

PK-20

TR Teknik Özellikler ve Standartlar

- » 2top Motor tahrikli
- » Piramit tipi tasarım
- » Ø 25mm'e kadar Boru bükme Kapasitesi
- » 20x20 Köşebent Bükme kapasitesi
- » Elv ile ayarlanabilir Üst top aşağı-yukarı hareketi

EN Technical Specifications and Standards

- » 2 driving rolls
- » Pyramid style design
- » Bending capacity: pipe up to 1"; angle up to 20x20 mm
- » Manual Hand Lever adjustment of Top Bending roll
- » Combination horizontal-vertical working position



Opsiyonel 220 V Monofaz Motor
Optional 220 V Single Phase Motor

Opsiyonel Ayaklı Model
Optional Model with Stand



PK-28

TR Teknik Özellikler ve Standartlar

- » Çelik gövde , 2 alt vals topu zincir dişli sistemle tahrik edilmiştir
- » Redüktörden direkt dişli sistemi ile tahrik edilmiştir , Üst mil boşta hareket etmektedir
- » 50 ve 19 mm iki ölçülük Boru kalıbından oluşan Standart Vals milleri DELRİNDEN imal edilmiştir.
- » Miller Sertleştirilmiş çelikten imal edilmiştir. El ile Ayarlanabilir yan dayamalar , Yatay ve dikey çalışma imkanı

EN Technical Specifications and Standards

- » Steel frame , 2 bottom rolls Chain Gear powered
- » Direct drive power system with gears
- » Top roll is idle (free rotation)
- » Plastic Pipe Bending Roll set has 2 sizes for 50mm and 19mm pipes , included as standard on the machine
- » Rolls shafts are special steel material hardened and ground
- » Manual Adjustable guide rolls
- » Horizontal and vertical working position




- » Sadece Ø19 - Ø50mm alüminyum boru bükülebilir
- » Only for Ø19 - Ø50mm aluminum bending jobs



Standart 220 V Monofaz Motor
Standard 220 V Single Phase Motor

Opsiyonel Ayaklı Model
Optional Model with Stand

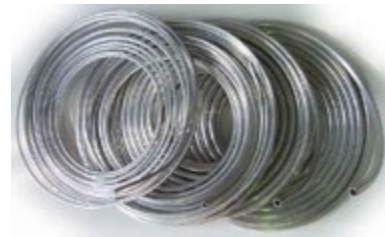

MODEL	Mil çapı Shaft Diameter	Vals topu Çapları Rolls Diameter	Vals Mili Uzunluğu Shaft Length	Kıvrırma Hızı Bending Speed	Tahrikli Top Adedi N° of Driven rolls	Yan Dayama Eksen adedi N° of side rolls axes	Motor Gücü Motor Power	Makina Ölçüleri Machine Dimensions	Ağırlık Weight
PK 20	20	86	60	7	2	1	0,37	350x580x550	80
PK 28	28	160	--	8	2	1	0,55	550x500x1400	105